



## Frequency Characteristics of ESR & |Z| Model : ACAS250S220E40

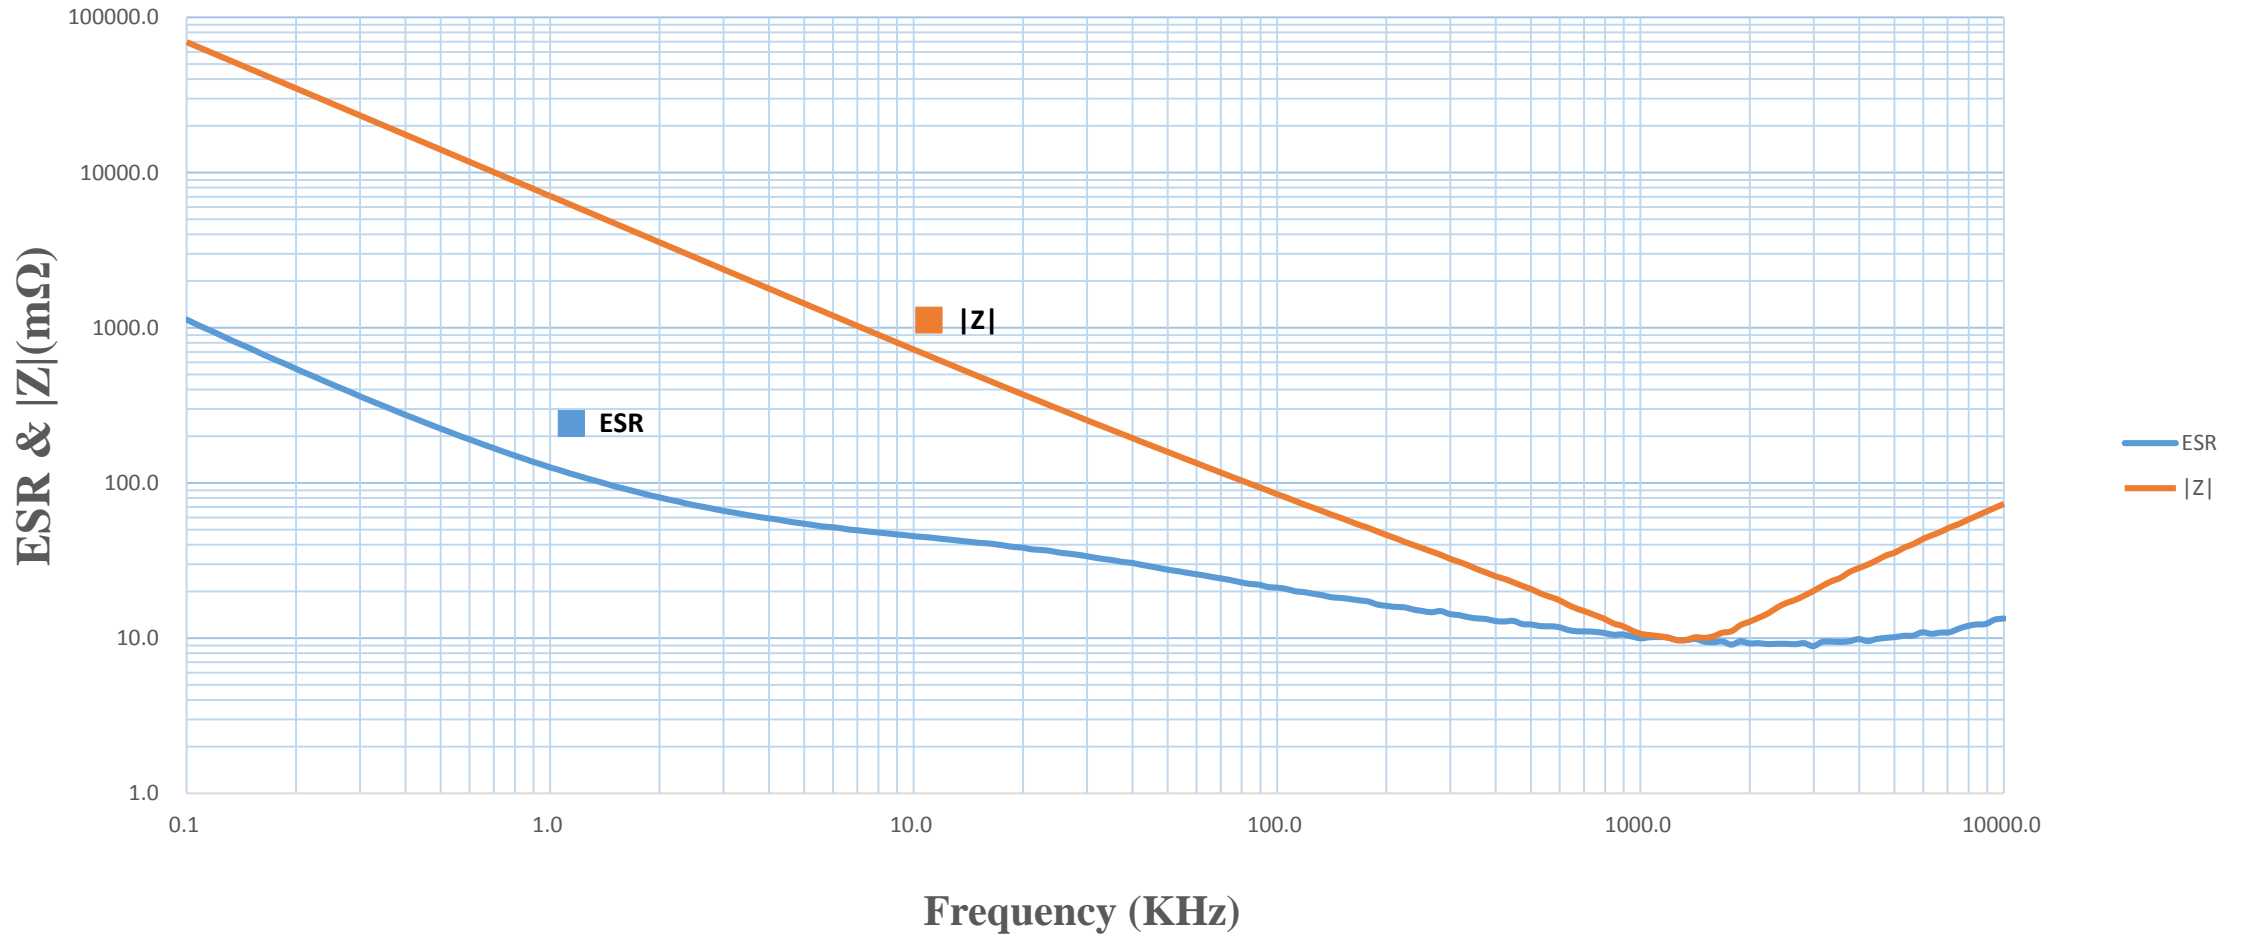

| Frequency(kHz) | 0.1     | 0.12    | 10    | 100  | 700  | 1,000 | 1,500 | 2,000 | 3,000 | 5,000 | 7,000 | 10,000 |
|----------------|---------|---------|-------|------|------|-------|-------|-------|-------|-------|-------|--------|
| <b>ESR</b>     | 1130.2  | 939.0   | 45.4  | 21.2 | 11.1 | 10.0  | 9.5   | 9.2   | 8.9   | 10.2  | 10.9  | 13.4   |
| <b> Z </b>     | 69292.2 | 58397.5 | 725.2 | 84.7 | 14.8 | 10.7  | 10.1  | 12.8  | 20.1  | 35.7  | 51.7  | 73.5   |

# Frequency Characteristics of Cap(uF)

Model : ACAS250S220E40

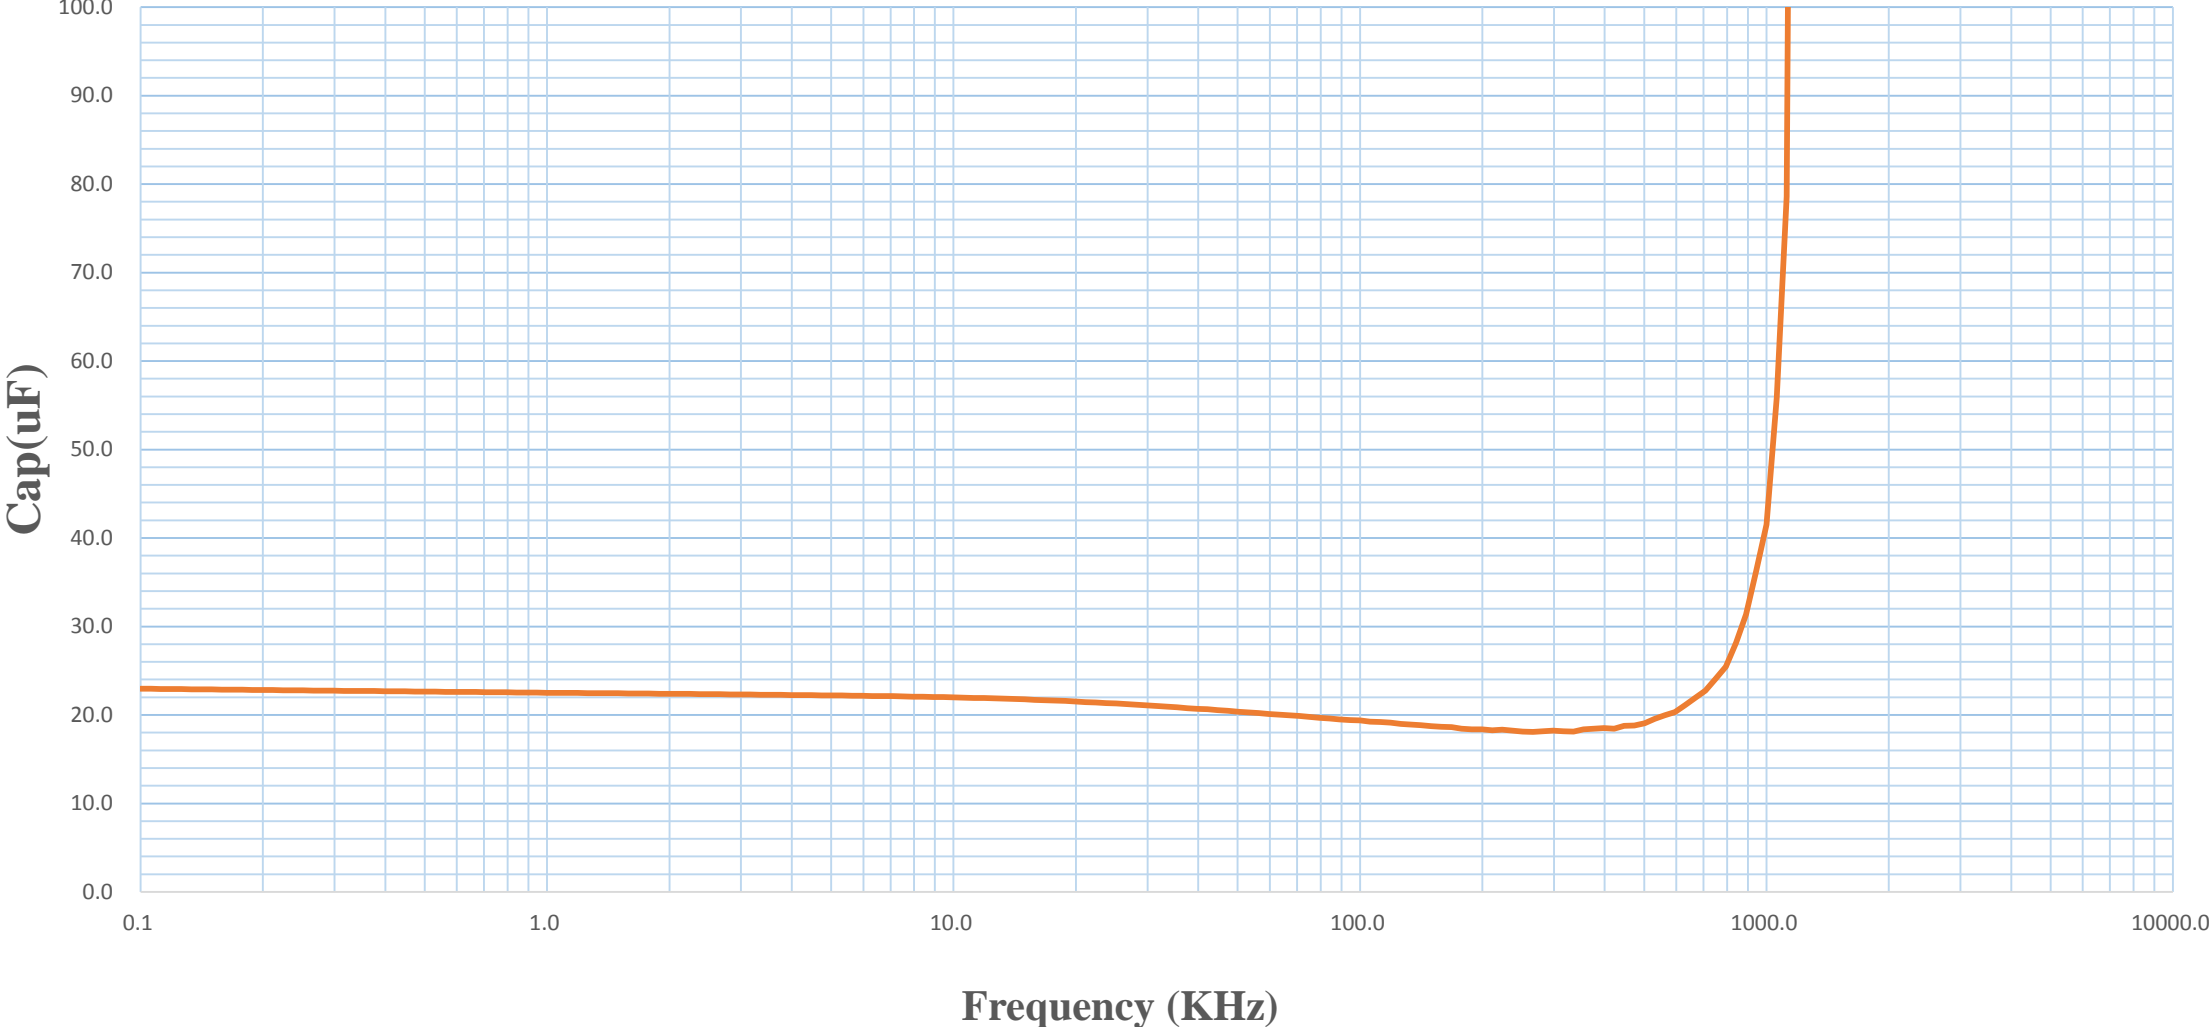

**Frequency Characteristics of ESL(nH)**  
**Model : ACAS250S220E40**

