



Taping Specifications and Package Quantity




■ Conductive Polymer Aluminum Solid Capacitors

Taping Specifications for Radial Type

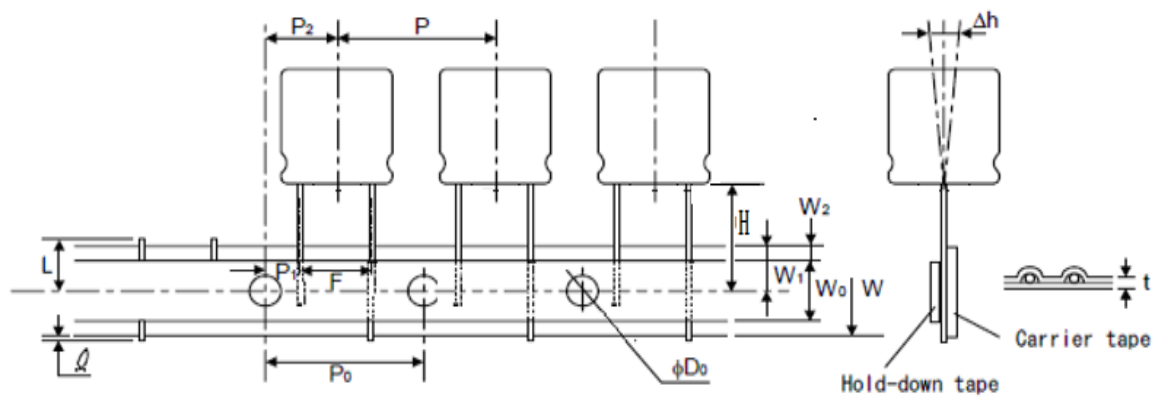


(unit : mm)

Size Code	F	P	P0	P1	P2	Δh	W	W0	W1	W2	H	$\Phi D0$	t	<i>Q</i>	L
Tolerance	0.8 -0.2	± 1.0	± 0.2	± 0.5	± 1.0	± 1.0	± 0.5	min	± 0.5	max	± 0.75	± 0.2	± 0.3	max	max
05X7	2	12.7	12.7	5.35	6.35	0	18	9.5	9	2.5	18.5	4	0.6	0	11
05X8															
05A0															
05A1															
05A2															
55X7															
55X9															
55A0															
55A1															
55A2															
06X5	2.5	12.7	12.7	5.1	6.35	0	18	9.5	9	2.5	18.5	4	0.6	0	11
06X6															
06X7															
06X8															
06A0															
06A1															
06A2															
06A3															
06A4															
06A5															
06A6															
08X6	3.5	12.7	12.7	4.6	6.35	0	18	9.5	9	2.5	18.5	4	0.6	0	11
08X8															
08A2															
08A3															
08A6															
08B0															
10A0	5	12.7	12.7	3.74	6.35	0	18	9.5	9	2.5	18.5	4	0.6	0	11
10A2															
10A3															
10A6															
10B0															

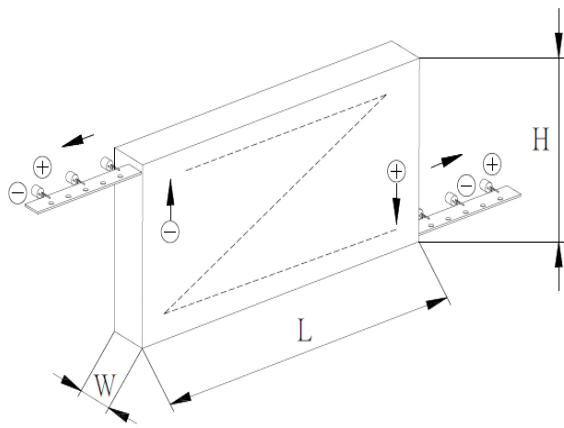

Size	L(mm) max	W(mm) max	H(mm) max
06X5/06X6	335	39	260
05X8/55X8	335	42	260
06X7/06X8			
08X6/08X8			
05A0/05A1			
55X9/55A0	335	45	260
55A1/05A2			
06A0			
06A1/08A2			
10A0/10A2			
10A3/06A2			
08A3/08A6	335	53	260
08B0			
06A3/06A4			
06A5/06A6			
10A3/10A6/10B0			
	335	55	260


Taping Specifications for SMD Type

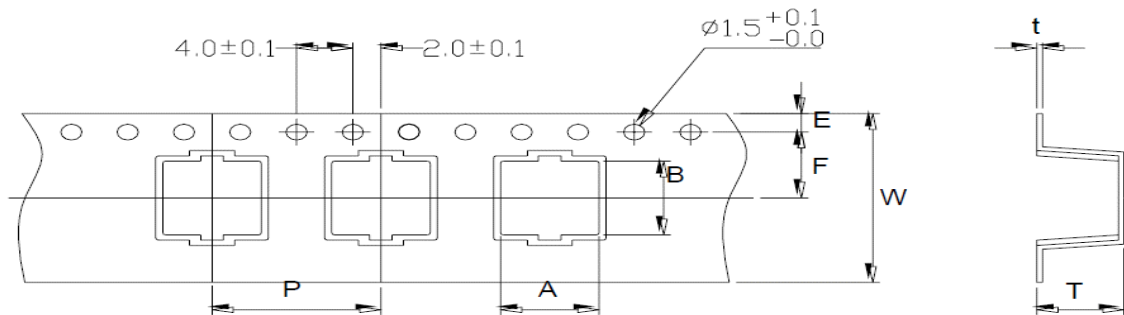


Size code	W±0.3 (mm)	A±0.2 (mm)	B±0.2 (mm)	F±0.1 (mm)	E±0.1 (mm)	P±0.1 (mm)	T±0.2 (mm)	t ±0.05 (mm)
0504	12	5.7	5.7	5.5	1.75	12	4.8	0.4
0545	12	5.7	5.7	5.5	1.75	12	4.8	0.4
0506	12	5.7	5.7	5.5	1.75	12	6.2	0.4
0604	16	6.8	6.8	7.5	1.75	12	4.8	0.4
0645	16	6.8	6.8	7.5	1.75	12	4.8	0.4
0607	16	7	7	7.5	1.75	12	7.3	0.4
0608	16	7	7	7.5	1.75	12	8.2	0.5
0610	16	7	7	7.5	1.75	12	10	0.5
0613	16->24	7	7	7.5	1.75	12	14	0.5

0807	24	8.7	8.7	11.5	1.75	12	7.2	0.5
0808	24	8.7	8.7	11.5	1.75	16	8.2	0.5
0810	24	8.7	8.7	11.5	1.75	16	10	0.5
0812	24	8.7	8.7	11.5	1.75	16	12	0.5
1008	24	10.7	10.7	11.5	1.75	16	9	0.5
1010	24	10.7	10.7	11.5	1.75	16	11	0.5
1012	24	10.7	10.7	11.5	1.75	16	13	0.5
1013	24	10.7	10.7	11.5	1.75	16	13	0.5
1016	24->32	10.7	10.7	11.5	1.75	16->24	17	0.5

(a) 5 、 6 、 8 phi

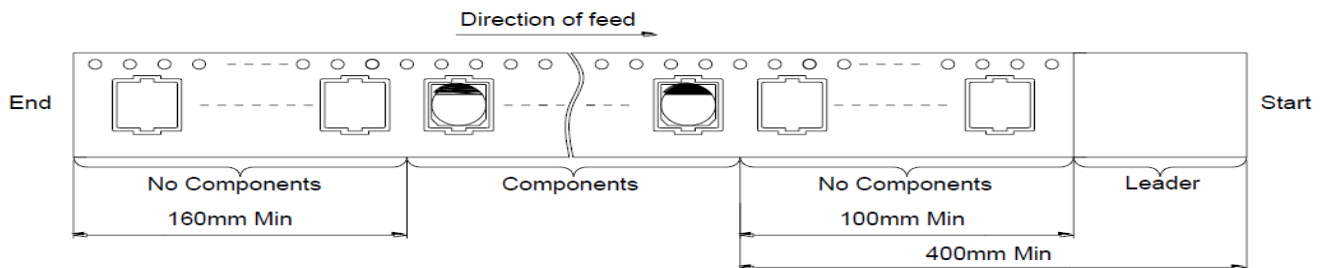


(b) 10 phi

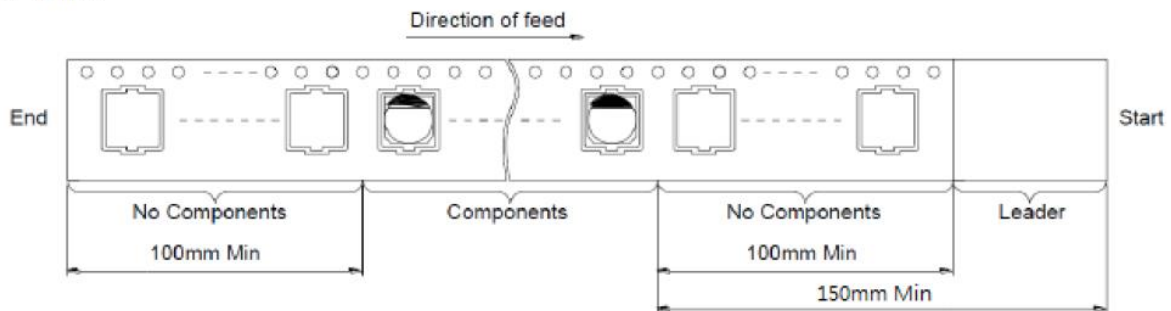

Reel Dimension and Package Quantity

Reel

Box

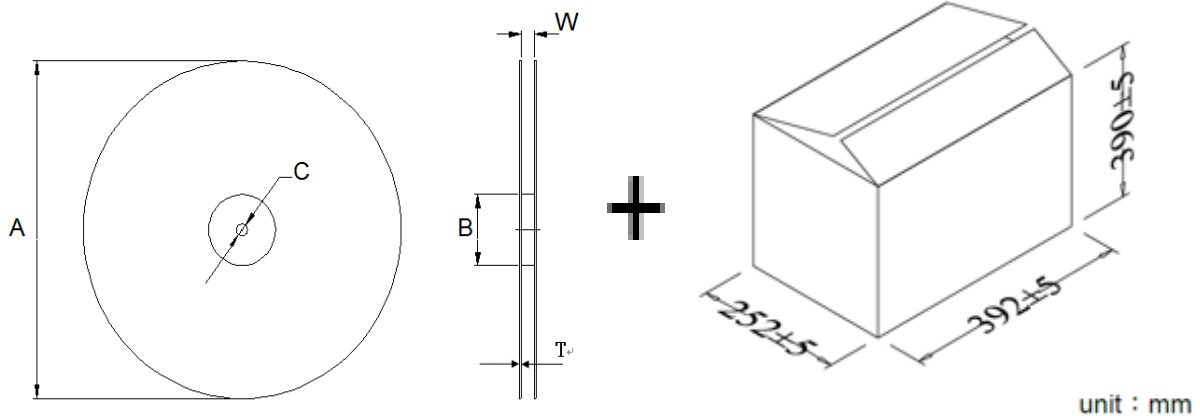




尺寸編號	A ± 2 (mm)	B ± 0.5 (mm)	C±0.5 (mm)	W±0.8 (mm)	T±0.3 (mm)
φ5	381	100	13	13.5	2.5
φ6	381	100	13	16.5	2.5
φ8	381	100	13	25.9	2.5
φ10	381	100	13	25.9	2.5

Case size	1 Reel	1 Box
0545	1.5K pcs	9K pcs(6 reels)
0506	1.2K pcs	7.2k pcs(6 reels)
0645	1.5K pcs	9K pcs(6 reels)
0606	1.2k pcs	7.2k pcs(6 reels)
0607	1k pcs	6k pcs(6 reels)
0608	900 pcs	5.4k pcs(6 reels)
0610	750 pcs	4.5K pcs(6 reels)
0807	1k pcs	5k pcs(5 reels)
0808	800 pcs	4k pcs(5 reels)
0810	500 pcs	2.5k pcs(5 reels)
0812	400 pcs	2k pcs(5 reels)
0813	400 pcs	2k pcs(5 reels)
1012	450 pcs	2.25k pcs(5 reels)
1013	450 pcs	2.25k pcs(5 reels)
1016	200 pcs	600 pcs(3 reels)




■ Conductive Polymer Solid Electrolytic Chip Capacitors

Taping Specifications for CAP Type

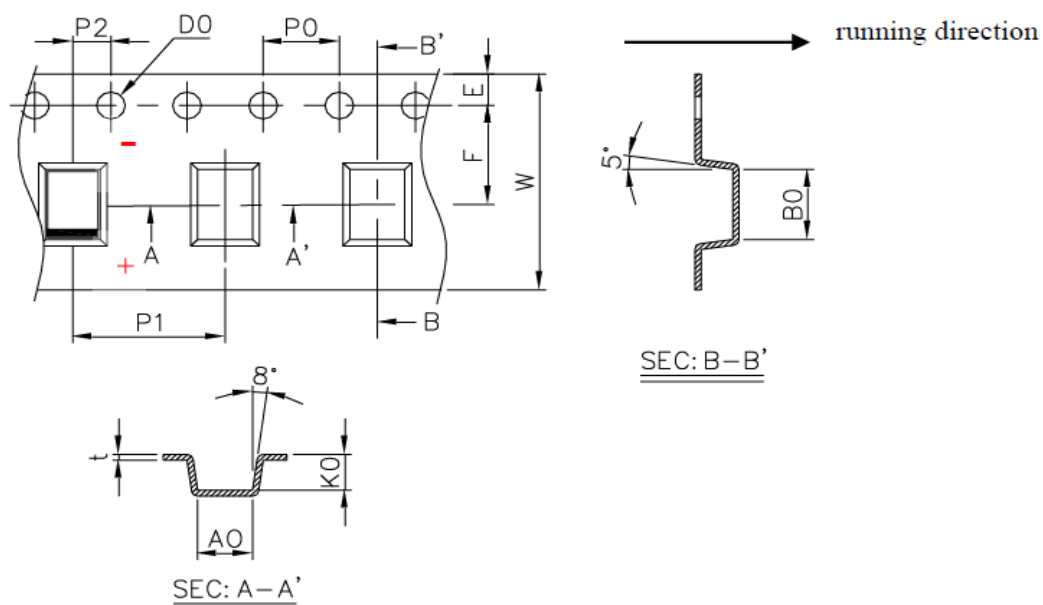

(Unit: mm)	W	P1	E	F	D0	P0	P2	A0	B0	K0	t
Dimension	12	8	1.75	5.5	1.5	4	2	5	7.6	2.3	0.24
Tolerance	±0.10	±0.10	±0.10	±0.10	0.1 0	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10

Reel Dimension and Package Quantity

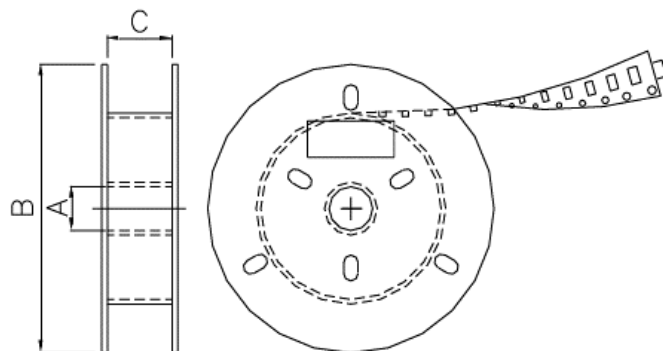


(unit: mm)

A	B	C
13.2±0.3	330±1.0	13.5±0.5

Case size	1 REEL	inner box(6 捲)	outer box(12 捲)
ACAS	3,500PCS	21KPCS	42KPCS
ACAH	3,500PCS	16.8KPCS	33.6KPCS

PE Bag Package

Package Quantity

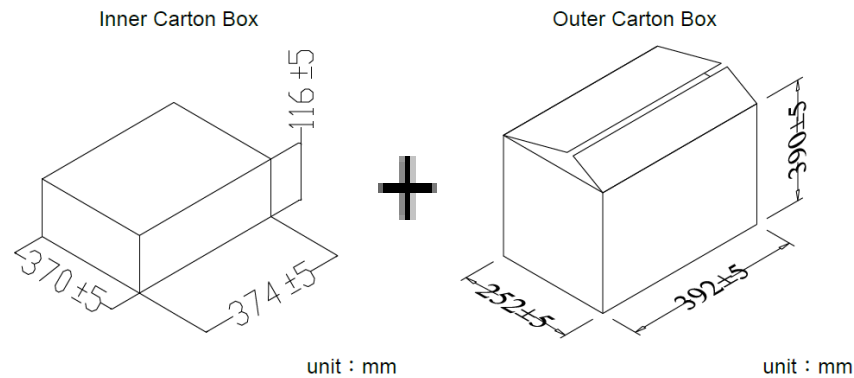

Radial Type (Standard)

Case size	PE bag	inner box	outer box
φ4	1,000 PCS	12 bags (12,000 PCS)	5 inner boxes (60,000 PCS)
φ5	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ05X8	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ05X9	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06X5	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06X6	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06X7	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06X8	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06X9	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A0	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A1	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ06A2	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ06A4	300 PCS	5 bags (1,200 PCS)	6 inner boxes (6,000 PCS)
φ08X6	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08X8	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08A2	400 PCS	4 bags (1,600 PCS)	5 inner boxes (8,000 PCS)
φ08A6	300 PCS	5 bags (1,200 PCS)	5 inner boxes (6,000 PCS)
φ10A0	300 PCS	4 bags (1,200 PCS)	5 inner boxes (6,000 PCS)
φ10A2	300 PCS	4 bags (1,200 PCS)	5 inner boxes (6,000 PCS)
φ10A3	200 PCS	4 bags (800 PCS)	5 inner boxes (4,000 PCS)
φ10A6	200 PCS	4 bags (800 PCS)	5 inner boxes (4,000 PCS)
φ10B0	200 PCS	4 bags (800 PCS)	5 inner boxes (4,000 PCS)



Radial Type (Lead Cutting)

Case size	PE bag	inner box	outer box
φ4	1,000 PCS	24 bags (24,000 PCS)	5 inner boxes (120,000 PCS)
φ5	500 PCS	8 bags (4,000 PCS)	5 inner boxes (20,000 PCS)
φ06X5	500 PCS	12 bags (6,000 PCS)	5 inner boxes (30,000 PCS)
φ06X6	500 PCS	12 bags (6,000 PCS)	5 inner boxes (30,000 PCS)
φ06X7	500 PCS	8 bags (4,000 PCS)	5 inner boxes (20,000 PCS)
φ06X8	500 PCS	8 bags (4,000 PCS)	5 inner boxes (20,000 PCS)
φ06X9	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A0	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A1	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A2	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A4	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ06A6	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08X6	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ08X8	500 PCS	6 bags (3,000 PCS)	5 inner boxes (15,000 PCS)
φ08A0	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08A2	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08A3	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08A6	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ08B0	400 PCS	4 bags (1,600 PCS)	5 inner boxes (8,000 PCS)
φ10A0	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ10A2	500 PCS	4 bags (2,000 PCS)	5 inner boxes (10,000 PCS)
φ10A3	400 PCS	4 bags (1,600 PCS)	5 inner boxes (8,000 PCS)
φ10A6	400 PCS	4 bags (1,600 PCS)	5 inner boxes (8,000 PCS)
φ10B0	350 PCS	4 bags (1,400 PCS)	5 inner boxes (7,000 PCS)
φ10B1	300 PCS	4 bags (1,200 PCS)	5 inner boxes (6,000 PCS)